


Ball Bearings(with setscrews)



SR type seal

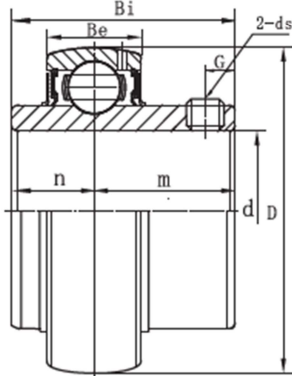

TRL type seal

UC 200
(normal-duty)

Bearing	Shaft Dia.	Dimensions(in)or(mm)							Basic Dynamic Load Rating	Basic Static Load Rating	Weight
No.	d	D	Bi	Be	n	m	G	ds	(kgf)	(kgf)	(kg)
	(in) (mm)										
UC 201 201-8	1/2	1,8504 47	1,2205 31.0	0,6693 17	0,5000 12.7	0,7205 18.3	0,1772 4.5	1/4 -28UNF M6X1.0	1310	679	0,21 0.21
UC 202 202-10	5/8	1,8504 47	1,2205 31.0	0,6693 17	0,5000 12.7	0,7205 18.3	0,1772 4.5	1/4 -28UNF M6X1.0	1310	679	0,19 0.19
UC 203 203-11	11/16	1,8504 47	1,2205 31.0	0,6693 17	0,5000 12.7	0,7205 18.3	0,1772 4.5	1/4 -28UNF M6X1.0	1310	679	0,18
UC 204-12 204	3/4	1,8504 47	1,2205 31.0	0,6693 17	0,5000 12.7	0,7205 18.3	0,1772 4.5	1/4 -28UNF M6X1.0	1310	679	0,16 0.16
UC 205-14 205-15 205 205-16	7/8 15/16 1	2,0472 52	1,3386 34	0,6693 17	0,5630 14.3	0,7760 19.7	0,2126 5.4	1/4 -28UNF M6X1.0	1431	804	0,23 0.21 0.20 0.20
UC 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	2,4409 62	1,5000 38.1	0,7480 19	0,6260 15.9	0,8740 22.2	0,2165 5.5	1/4 -28UNF M6X1.0	1986	1154	0,34 0.32 0.32
UC 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	2,6346 72	1,6890 42.9	0,7874 20	0,6890 17.5	1,0000 25.4	0,2559 6.5	5/16 -24UNF M8X1.0	2619	1561	0,54 0.51 0.48 0.46 0.45
UC 208-24 208-25 208	1 1/2 1 9/16	3,1496 80	1,9370 49.2	0,8268 21	0,7480 19.0	1,1890 30.2	0,3150 8	5/16 -24UNF M8X1.0	3012	1851	0,68 0.65 0.62
UC 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	3,2465 85	1,9370 49.2	0,8661 22	0,7480 19.0	1,1890 30.2	0,3150 8	5/16 -24UNF M8X1.0	3232	2110	0,78 0.74 0.70 0.68
UC 210-30 210-31 210 210-32	1 5/8 1 15/16 2	3,5433 90	2,0315 51.6	0,9449 24	0,7480 19.0	1,2835 32.6	0,3937 10	3/8 -24UNF M10X1.0	3579	2365	0,84 0.79 0.76
UC 211-32 211-34 211 211-35	2 2 1/8 2 1/16 2 3/16	3,8370 100	2,1890 55.6	0,9843 25	0,8740 22.2	1,3150 33.4	0,3937 10	3/8 -24UNF M10X1.0	4427	2982	1,26 1.15 1.01 1.09
UC 212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	4,3307 110	2,5630 65.1	1,0630 27	1,0000 25.4	1,5630 39.7	0,3937 10	3/8 -24UNF M10X1.0	4873	3360	1,60 1.45 1.45 1.33
UC 213-40 213	2 1/2	4,7244 120	2,5630 65.1	1,1024 28	1,0000 25.4	1,5630 39.7	0,3937 10	3/8 -24UNF M10X1.0	5838	4082	1,94 1.80
UC 214-44 214	2 3/4	4,9213 125	2,8370 74.6	1,1811 30	1,1890 30.2	1,7480 44.4	0,4724 12	7/16 -20UNF M12X1.5	6207	4595	2,06 1.99
UC 215 215-47 215-48	2 15/16 2	5,1181 130	3,0630 77.8	1,1811 30	1,3110 33.3	1,7520 44.5	0,4724 12	7/16 -20UNF M12X1.5	6746	5051	2,19 2.12
UC 216 216-50	3 1/8	5,5118 140	3,2520 82.6	1,2992 33	1,3110 33.3	1,9410 49.3	0,5512 14	7/16 -20UNF M12X1.5	7301	5541	2,72
UC 217-52 217	3 1/4	5,9055 150	3,3740 85.7	1,3780 35	1,3425 34.1	2,0315 51.6	0,5512 14	7/16 -20UNF M12X1.5	8491	6527	3,66 3.45
UC 218-56 218	3 1/2	6,2992 160	3,7796 96.0	1,4567 37	1,5630 39.7	2,2165 56.3	0,5512 14	1/2 -20UNF M12X1.5	9794	7291	4,46 4.35