

AC144 Series

Low Cost Miniature Industrial Multipurpose Accelerometer, Side Exit 2 Pin Mini-MIL Connector, 100 mV/g, ±15%



VIBRATION ANALYSIS HARDWARE



Product Features


Low-Cost mini-MIL Industrial Accelerometer, Great for Hard-to-Reach Locations

- ▶ ± 50 g, Dynamic Range
- ▶ 100 mV/g Frequency Response
- ▶ 2 pin Mini-MIL Side Connector

AC144-1D

2 Pin Mini Mil Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC144-2D

CB110 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC144-3D

CB206 Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC144-6D

CB611 Heavy Duty Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC144-6N

CB111 Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC144	M/AC144	Environmental		
Sensitivity (±15%)		100 mV/g	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	36-600,000 CPM	0,6-10000 Hz	Maximum Shock Protection	5,000 g, peak	
Dynamic Range		± 50 g, peak	Electromagnetic Sensitivity	CE	
Electrical			Sealing	Welded, Hermetic	
Settling Time	<2.5 seconds		Submersible Depth	200 ft.	60 m
Voltage Source (IEPE)	18-30 VDC		Physical		
Constant Current Excitation	2-10 mA		Sensing Element	PZT Ceramic	
Spectral Noise @ 10 Hz	30 µg/√Hz		Sensing Structure	Shear Mode	
Spectral Noise @ 100 Hz	4 µg/√Hz		Weight	2.1 oz	60 grams
Spectral Noise @ 1000 Hz	2 µg/√Hz		Case Material	316L Stainless Steel	
Output Impedance	<100 ohm		Mounting	1/4-28	
Bias Output Voltage	7-14 VDC		Connector (Non-Integral)	2 Pin mini-MIL	
Case Isolation	>10 ⁸ ohm			(J Series)	
			Resonant Frequency	1,920,000 CPM	26000 Hz
			Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
			Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
			Calibration Certificate	CA10	

Typical Frequency Response

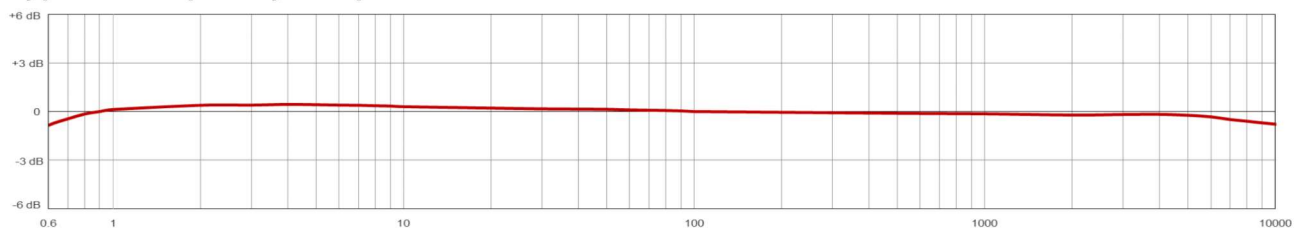

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900